
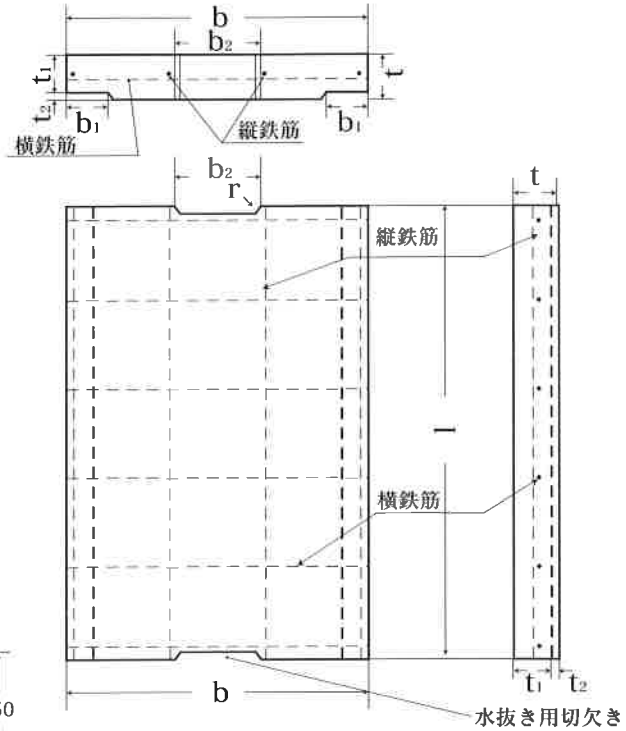



# 鉄筋コンクリートU形用ふた

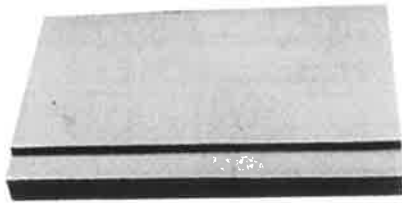

## 100用蓋

横鉄筋2.6×450=2本

横鉄筋2.6×120=5本

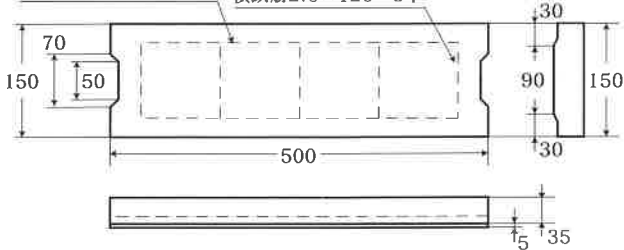

単位 mm

種別	呼び名	寸法								鉄筋				参考重量 (kg)
		b	b <sub>1</sub>	t	t <sub>1</sub>	t <sub>2</sub>	l	r <sup>(1)</sup>	b <sub>2</sub> <sup>(1)</sup>	縦鉄筋		横鉄筋		
										径	数量(本)	径	数量(本)	
1	150	210	35	35	30	5	600	15	75	2.6	3	2.6	5	10
	180	250	40	40	35	5	600	15	75	2.6	3	2.6	6	14
	240	330	50	45	40	5	600	15	90	3.2	4	3.2	6	21
	300	400	55	60	50	10	600	15	100	3.2	4	4.0	6	33
	360	460	55	65	55	10	600	18	120	3.2	4	5.0	6	41
	450	560	60	70	60	10	600	18	120	4.0	5	6.0	5	55
2	600	740	75	75	65	10	600	18	150	4.0	6	6.0	6	78
	150	210	35	90	80	10	600	15	75	6.0	3	6.0	7	26
	180	250	40	90	80	10	600	15	75	6.0	4	9.0	5	32
	240	330	50	100	85	15	600	15	90	6.0	5	9.0	5	46
	300	400	55	100	85	15	600	15	100	6.0	6	9.0	6	55
	360	460	55	100	85	15	600	18	120	6.0	7	9.0	7	64
種	450	560	60	120	100	20	600	18	120	9.0	6	9.0	7	93
	600	740	75	150	130	20	600	18	150	9.0	6	13.0	6	155

(注) 水抜き用切欠きは省くことができる